
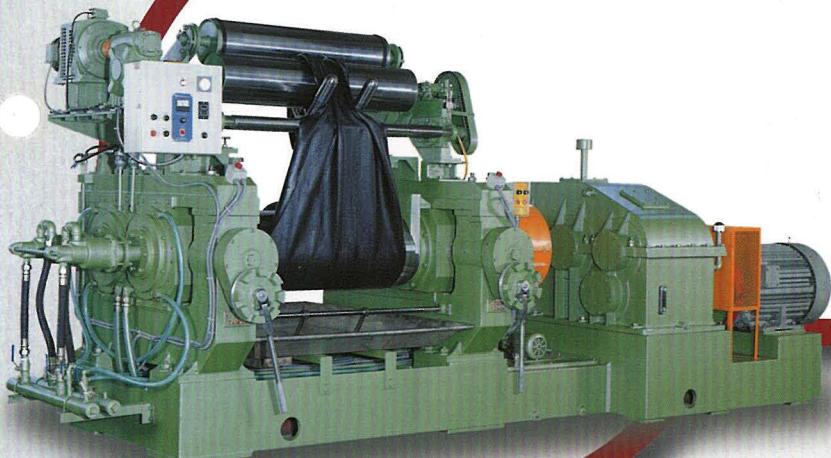


# Stock Blender

## 翻 料 機

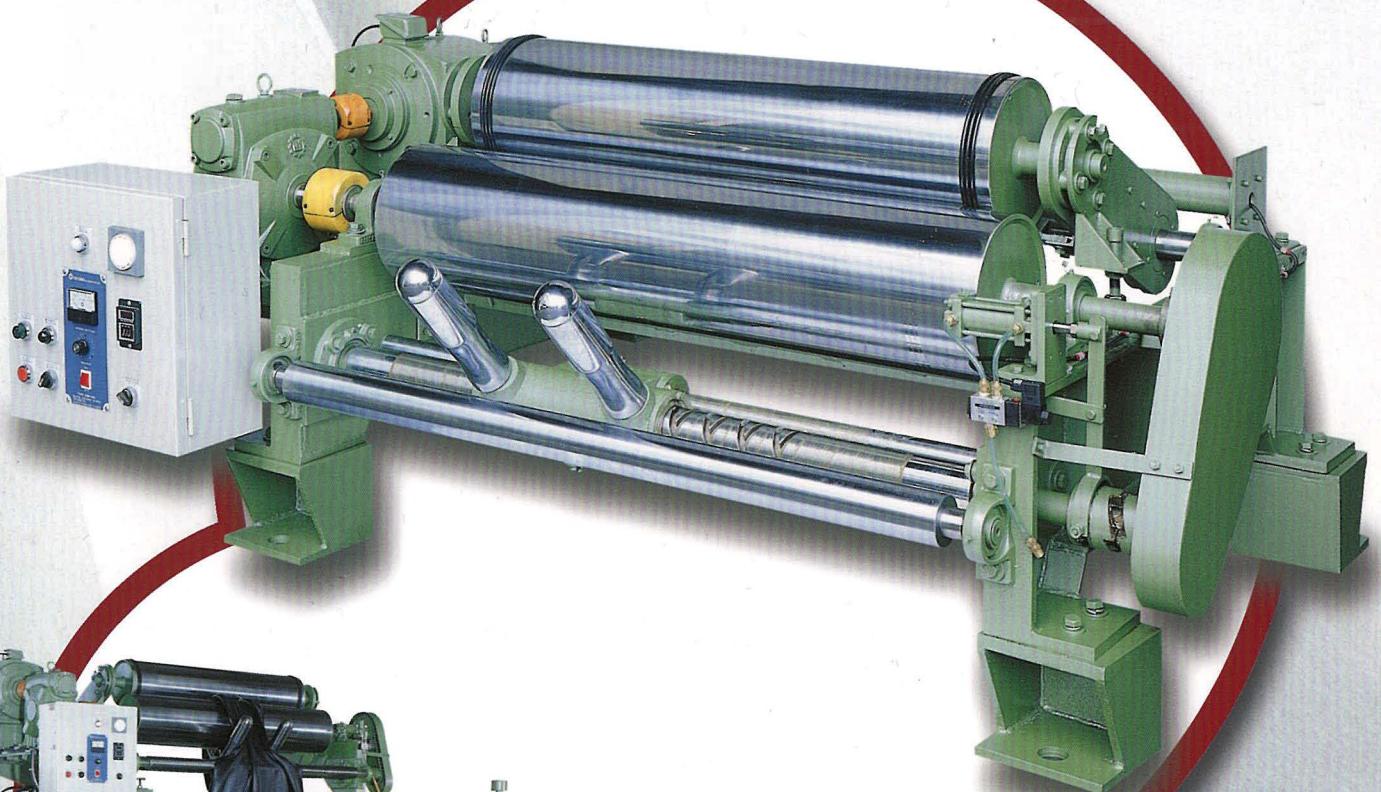

## TYPICAL APPLICATIONS


The stock blender is installed on the two roll open mixing mill to assist the operator in the mixing of rubber material and chemical powder. It features automatic continuous operation, reducing labor requirements, providing safe working conditions, lowering the material temperature, speeding the mix rate and maintaining quality.

The action of travel guide holder for the stock blender includes both guide bar type and hydraulic type.

## 用 途

翻料機裝設於開放式雙滾筒混合機上方，使混合作業能自動連續進行，減輕操作人員勞力負擔，維護作業安全，並能增加作業面積，降低膠料之作業溫度，使混合的速度更快更均勻，效果更好，能有效的提高產品品質。本機種依走座的作動方式可分為導桿式及油壓式兩種。

### Outline

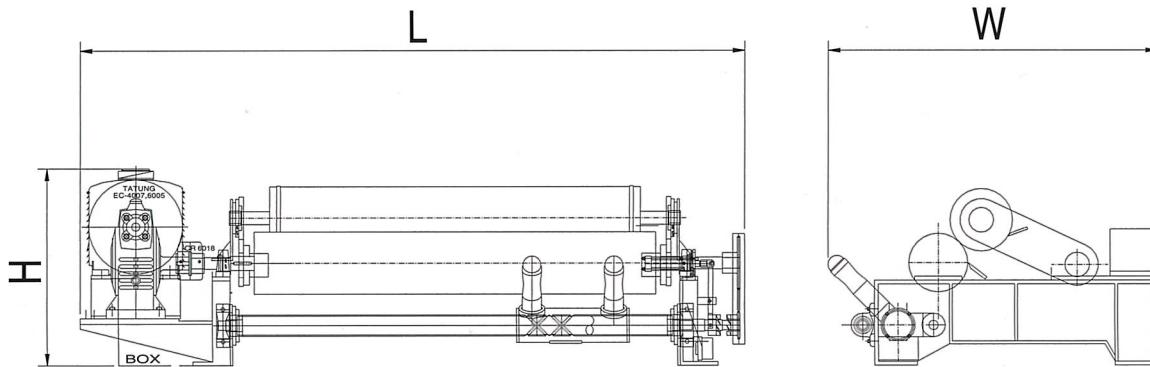

## SPECIFICATIONS:

規 格	Size 尺寸	For mixing mill size 配合混合機尺寸	Machine dimensions (LxWxH) (Unit: mm) 外觀尺寸(長x寬x高) 單位: mm
	<b>SB14</b>	Ø14" X 36" L	1820 x 1280 x 760
	<b>SB16</b>	Ø16" X 42" L	2150 x 1425 x 760
	<b>SB18</b>	Ø18" X 48" L	2350 x 1425 x 800
	<b>SB20</b>	Ø20" X 54" L	2600 x 1480 x 820
	<b>SB22</b>	Ø22" X 60" L	2850 x 1680 x 820
	<b>SB24</b>	Ø24" X 72" L	3550 x 1650 x 872
	<b>SB26</b>	Ø26" X 84" L	3600 x 1700 x 920

- 本型錄為提供客戶訂購參考用，若遇設計及規格變更，恕不另行通知。
- This catalogue is for order reference only. Designs and specifications are subject to change without notice.